

Multicolored Fiber Optic Patch Cable

How to order

STEP 1 - FO CONSTANT FOR FIBER OPTIC

STEP 2 - Select the Type of Jacket

STEP 3 - Select an Appropriate Core Size

STEP 4 - Determine Length

STEP 5 - Select the Connector Type

STEP 6 - Choose Your Color

SEE BUYER'S GUIDE BELOW FOR THE RANGE OF CHOICES


Key	FO	CMR	50	001M	STST	BL
	CONSTANT	JACKET	CORE SIZE	LENGTH	CONNECTORS	COLOR

Step 1	Step 2	Step 3	Step 4	Step 5	Step 6
CONSTANT	JACKET	CORE SIZE	LENGTH	CONNECTORS	COLOR
FO	CMR (PVC)	62 - (62.5 Micron OM1)	001M - (1 Meter)	STST - (ST to ST)	BL (Blue)
	CMP (Plenum)	50 - (50 Micron OM2)	002M - (2 Meters)	SCSC - (SC to SC)	OR (Orange)
	LZH (Low-Smoke)	10 - (10-Gigabit Laser-Optimized OM3)	003M - (3 Meters)	LCLC - (LC to LC)	GN (Green)
		M4 - (10-Gigabit Laser-Optimized OM4)	004M - (4 Meters)	MTMT - (MT-RJ to MT-RJ)	BR (Brown)
		SM - (Single-Mode OS2)	005M - (5 Meters)	STSC - (ST to SC)	GR (Gray)
			006M - (6 Meters)	STLC - (ST to LC)	WH (White)
			007M - (7 Meters)	STMT - (ST to MT-RJ)	RD (Red)
			008M - (8 Meters)	SCLC - (SC to LC)	BK (Black)
			010M - (10 Meters)	LCMT - (LC to MT-RJ)	YL (Yellow)
			015M - (15 Meters)	SCMT - (SC to MT-RJ)	VT (Violet)
			020M - (20 Meters)		PK (Pink)
			025M - (25 Meters)		AQ (Aqua)
			030M - (30 Meters)		

<p>EXAMPLES OF FIBER OPTIC CABLE CODES:</p> <p>FOCMR62-001M-STST-BL: Cable with a PVC jacket, 62.5-micron core, 1-meter length, ST-ST connectors in blue</p> <p>FOCMP50-008M-STLC-OR: Cable with a plenum jacket, 50-micron core, 8-meter length, ST-LC connectors in orange</p> <p>FOCMRSM-030M-SCLC-YL: Cable with a PVC jacket, 9-micron core, 30-meter length, SC-LC connectors in yellow</p>

*Note: if you wish to order a cable with a length other than those specified here, such as 12 feet, please call customer service at 1.877.877.2269

LC and MT-RJ Connectors

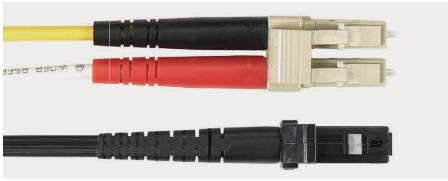

Overview

Matching fiber patch cable to your company, department or school colors, or that special color-coded networking application is now much easier with Black Box Multicolor Fiber Patch Cables.

Color your world. These cables come in 12 standard colors that are ideal for color-coding applications, users, security levels and more from the data center to the desktop. With 12 colors to choose from, you have a lot of options. For instance, you can use red to indicate secure lines and blue for unsecure lines. Or use green for finance and white for customer service.

Select core, connectors, colors and length core:

62.5-micron multimode OM1
50-micron multimode OM2
50-micron multimode, 10-GbE laser-optimized OM3
50-micron multimode, 10-GbE laser-optimized OM4
9-micron single-mode OS2

Connectors

ST, SC, LC, and MT-RJ in 10 combinations

Colors

12 Colors


Length

13 lengths ranging from 1 to 30 meters
Once you've decided what type of cable you want, look at the charts to see how to build your cable part number. It's super easy and super convenient. No need to get a custom quote.

Top Quality

You can be assured of high performance at all levels. The cables comply with a variety of industry standards.

ST and SC Connector

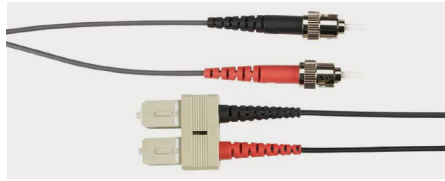

Tech Specs

Attenuation

62.5- μ m:
850 nm: ≤ 2.9 dB/km;
1300 nm: ≤ 0.6 dB/km;
50- μ m PVC: 850 nm: ≤ 2.6 dB/km;
1300 nm: ≤ 0.6 dB/km;
10-GbE 50- μ m OM3 PVC:
850 nm: ≤ 2.3 dB/km;
1300 nm: ≤ 0.6 dB/km;
10-GbE 50- μ m OM4:
850 nm: ≤ 2.3 dB/km;
1300 nm: ≤ 0.6 dB/km;
9- μ m: 1310 nm: ≤ 0.35 dB/km;
1550 nm: ≤ 0.22 dB/km;

Operating Temperature—
-76 to +185° F (-60 to +85° C);
Optimized Data Rate —
62.5- μ m:
850 nm: 1 Gbps over 300 m;
1300 nm: 1 Gbps over 550 m;
50- μ m: 1 Gbps over 600 m;
10-GbE 50- μ m: 1 Gbps over 1000 m at 850 nm;
10-Gbps at 300 m at 850 nm;
10-GbE 50- μ m OM4:
10-Gbps at 550 m at 850 nm;
9- μ m OS2: 10 Gbps up to 40 km

Standards — 62.5- μ m:
ISO/IEC 11801: Type OM1 fiber;
IEC 60793-2-10: Type A1b fiber;
TIA 492AAAA-A;
50- μ m PVC: ISO/IEC 11801:
Type OM2 fiber;
IEC 60793-2-10:
Type A1a.1 fiber;
TIA/EIA: 492AAAB;
10-GbE 50- μ m PVC:
ISO/IEC 11801:
Type OM3 fiber;
Type A1a.2
TIA 492AAAC;
10-GbE 50- μ m PVC:
Type OM4 fiber;
Type A1a.3;
TIA 492AAAD
Single-mode: ITU-T G.652
(Categories A, B, C, D);
IEC 60793-2-50;
TIA/EIA-492CAAA;
Telecordia GR-20

Bandwidth — 62.5- μ m OM1:

Intermediate performance
EMB:
850 nm: 220 MHz/km;
Legacy performance EMB:
850 nm: 200 MHz/km;
1300 nm: 500 MHz/km;
50 - μ m OM2:
Intermediate performance
EMB:
850 nm: 510 MHz/km;
Legacy performance EMB:
850 nm: 500 MHz/km;
1300 nm: 500 MHz/km;
10-GbE 50- μ m OM3: EMB:
850 nm: 2000 MHz/km;
Legacy performance EMB:
850 nm: 1500 MHz/km;
1300 nm: 500 MHz/km
10-GbE 50- μ m OM4: EMB:
850 nm: 4700 MHz/km
Cladding Diameter — 125 μ m
Core Diameter — 62.5 μ m,
50 μ m, or 9 μ m

Features

Select from OM1, OM2, OM3, OM4 and OS2 cable with 4 different connectors, 12 colors and 13 lengths

Ideal for color-coded apps

Higher data aggregation in the backbone, riser and high-speed parallel interconnects (hspis)

Full compatibility with the broad range of laser-based and legacy protocol and applications

Industry-leading cpc® coatings for superior microbend and environmental performance

Choose from 12 colors: violet, orange, blue, black, green, grey, brown, red, pink, white, aqua and yellow

WHY CHOOSE BLACK BOX?

Our dedicated team of technical experts will help you lay the foundation for the connected building experience. As your trusted partner and leader in connected building technologies, from wireless to infrastructure, we will help you design, deploy, and manage the right solution to transform your building and empower the people in it.

ABOUT BLACK BOX

Black Box® is a trusted IT solutions provider delivering cutting-edge technology products and world-class consulting services to businesses across the globe in every industry. The breadth of our global reach and depth of our expertise accelerate customer success by bringing people, ideas, and technology together to solve real-world business problems.

